

# SENATOR SERIES FEATURES

**SUBFLOORING** – 12-gauge steel outriggers, fully welded with floor-level Z rail, incorporated with chassis-rubber ride capabilities.

**FLOORING** – 3/4" FRP, undercoated. Floor covered with 1/8" transit rubber. Aluminum heat shield over chassis, catalytic converter, and muffler.

**SIDEWALLS** – 3/4" polyurethane foam insulation (R-6. 12) gelcoated to 1/4" FRP exterior with 1/4" FRP interior. Reinforced with steel perimeter and transverse supports. Completely fiberglassed to adjoining body parts to form a single unitized body.

**ROOFING** – One-piece FRP/Nidacore laminate roof with steel-cage reinforcement.

**WINDOWS** – 24" x 34" T-slider, 31% tinted. Clamp ring-style radius windows. Egress windows installed to meet FMVSS 217 requirements.

**ENTRY** – Spacious entry (32" x 83" clear opening) with doors that operate manually or electric. The door panels are full height glass. White step nosing and lighted stepwell standard. Entrance grab rail (left side).

**LIGHTING** – Each bus comes standard with six passenger courtesy lights.

**ELECTRICAL** – Wiring is color-coded with the number and function designated every 12" on the wire to enable identification and circuit traceability. Only premium components built to meet the Society of Automotive Engineers (S.A.E.) and Underwriters Laboratories (U.L.) requirements are used. Electronic control console switch panel.

**OPTIONAL A/C & HEAT** – A/C systems ranging in size from 30,000 BTU to 88,000 BTU. Rear heat 40,000 BTU to 65,000 BTU.

**OPTIONAL PARATRANSIT** – Wheelchair accessibility with a wide range of securement systems and seating arrangements.

**OPTIONAL LUGGAGE** – Luggage can be stored in over-seat, floor-to-ceiling, rear compartments, or custom-designed areas.

**OPTIONAL SEATING** – Forward-facing, perimeter-style, and track seating are all available. Your choice of vinyl and cloth fabric in a wide range of colors.

- Bright white gelcoated body
- Exterior mirrors – 8" x 15"
- Heavy-duty, 10-gauge wrap around bumper with anti-ride cover
- Mud flaps (front and rear)
- 12-month/12,000 mileage with five-year/75,000-mile warranty of body structure

## CHEVROLET SPECIFICATIONS


- Chevrolet 12,300 GVW cutaway
- Tinted glass
- Automatic transmission
- 4:10 rear axle ratio
- Power steering
- Power brakes
- Dash A/C and heater
- Super engine cooling
- Tilt steering and cruise control
- 368-cubic-inch (Vortec 6000) 6.0L gas
- 35-gallon fuel capacity
- Radial tires LT225-16 D
- Chrome front bumper with license plate bracket
- Comfort-ride suspension – H.D. springs and shocks
- Read-out gauges
- Heavy-duty batteries
- 145 AMP alternator
- 139", 159", or 177" wheelbase

### Dimensions


- Exterior width – 96"
- Exterior height – 114"
- First step to ground – 11 1/2" second-and third-step riser – 9" max.
- Step tread depth – 9" max.
- Entrance clear opening – 32" x 83" min.
- Interior width at seat level – 92 1/2"
- Interior width up 36" from floor – 93 3/8"
- Center aisle height – 80 1/2"
- Flat floor aisle height – 75"
- Double wheelchair doors – 46" x 70.5"
- Rear luggage compartment – 141 cubic feet (standard)

Due to Supreme Corporation's commitment to product quality, specifications and options are subject to change in the interest of product improvement and market changes.


Floorplans shown are only a few of the designs available.




10 Passengers and 2 W/C

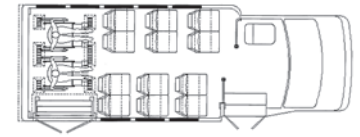

12 Passengers and 2 W/C



17 Passengers

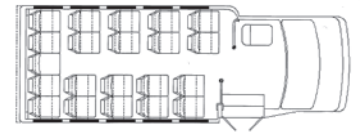

21 Passengers



21 Passengers w/Luggage



2592 East Kercher Road • Goshen, IN 46528  
574-642-4730 • 877-258-1391 • FAX 574-642-4108  
www.StarTransBus.com



Please call today for a dealer near you.